

2014-2-28

ZAF105

EXPLOSION PROOF/CORROSION PROOF CAMERA HOUSING FOR HAZARDOUS AREA

MAIN FEATURES

- Stainless steel 304 or 316L material
- Enclosure Protection: IP68
- Exd II BT6 & DIP A20, TA, T6
- Applicable for the circumstances of explosive gas, oil, powder, such as hydrogen (H₂) and hydrocarbon gas in the plants (except C₂H₂).
- Fit for gas zone 1, zone 2, dust zone 21, 22
- Optional power input: DC12V, AC24V, AC100~240V, POE power supply
- Working Current: ≤1000mA
- Optional lower temperature range: -50 to 65 °C




ZAF105 HOUSING


Model	ZAF105-S	ZAF105-SS
Atmospheric pressure	80KPa~110Kpa	
Ambient Temperature	-20°C~+60°C	
Relative Humidity	≤95% (+25°C)	
Ex-proof mark	Ex d II BT6 & DIP A20, TA, T6	
Explosion proof Certified	CNEEx 13.2138	
Window glass	8mm thickness tempered glass	
Ingress Protection	IP68	
Optional Voltage Input	AC24V, AC100~240V, DC12V, POE POWER SUPPLY	
Overall dimension	329*169*173mm	
Net weight	7.5kg	
Housing Material	Stainless Steel 304	Stainless Steel 316L
Auto-heating, cooling kit	-25 to +65°C	
	-50 to +65°C (lower temperature version)	



ZAF105 CORROSION PROOF PAINTING



ZAZ100B WALL BRACKET

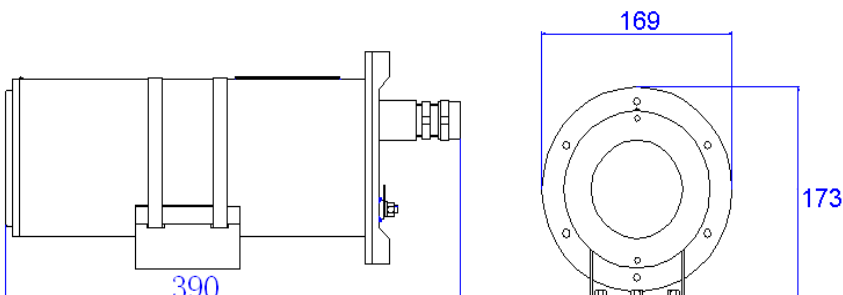

FLEXIBLE TUBE